




# FS Original

Single fired floor tiles

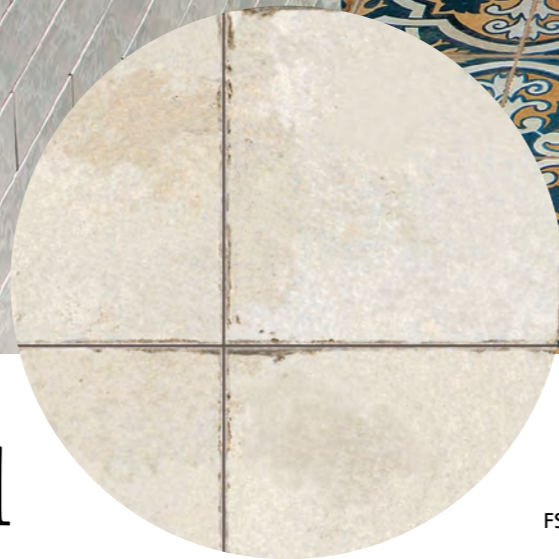

FS0




FS2



# FS Original

Single fired floor tiles

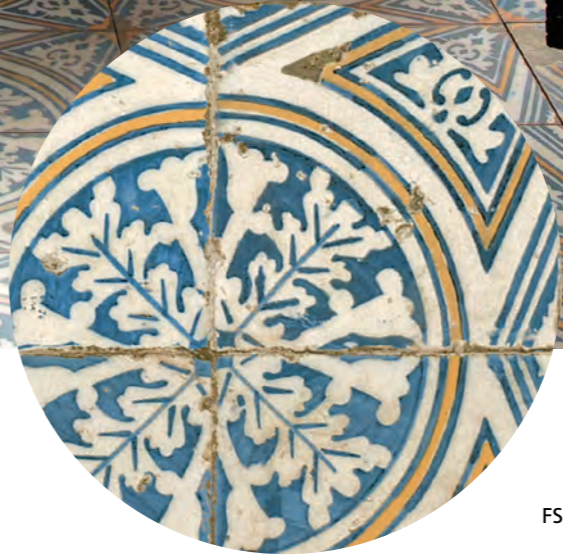


FS1



# FS Original

Single fired floor tiles

FS Nijar

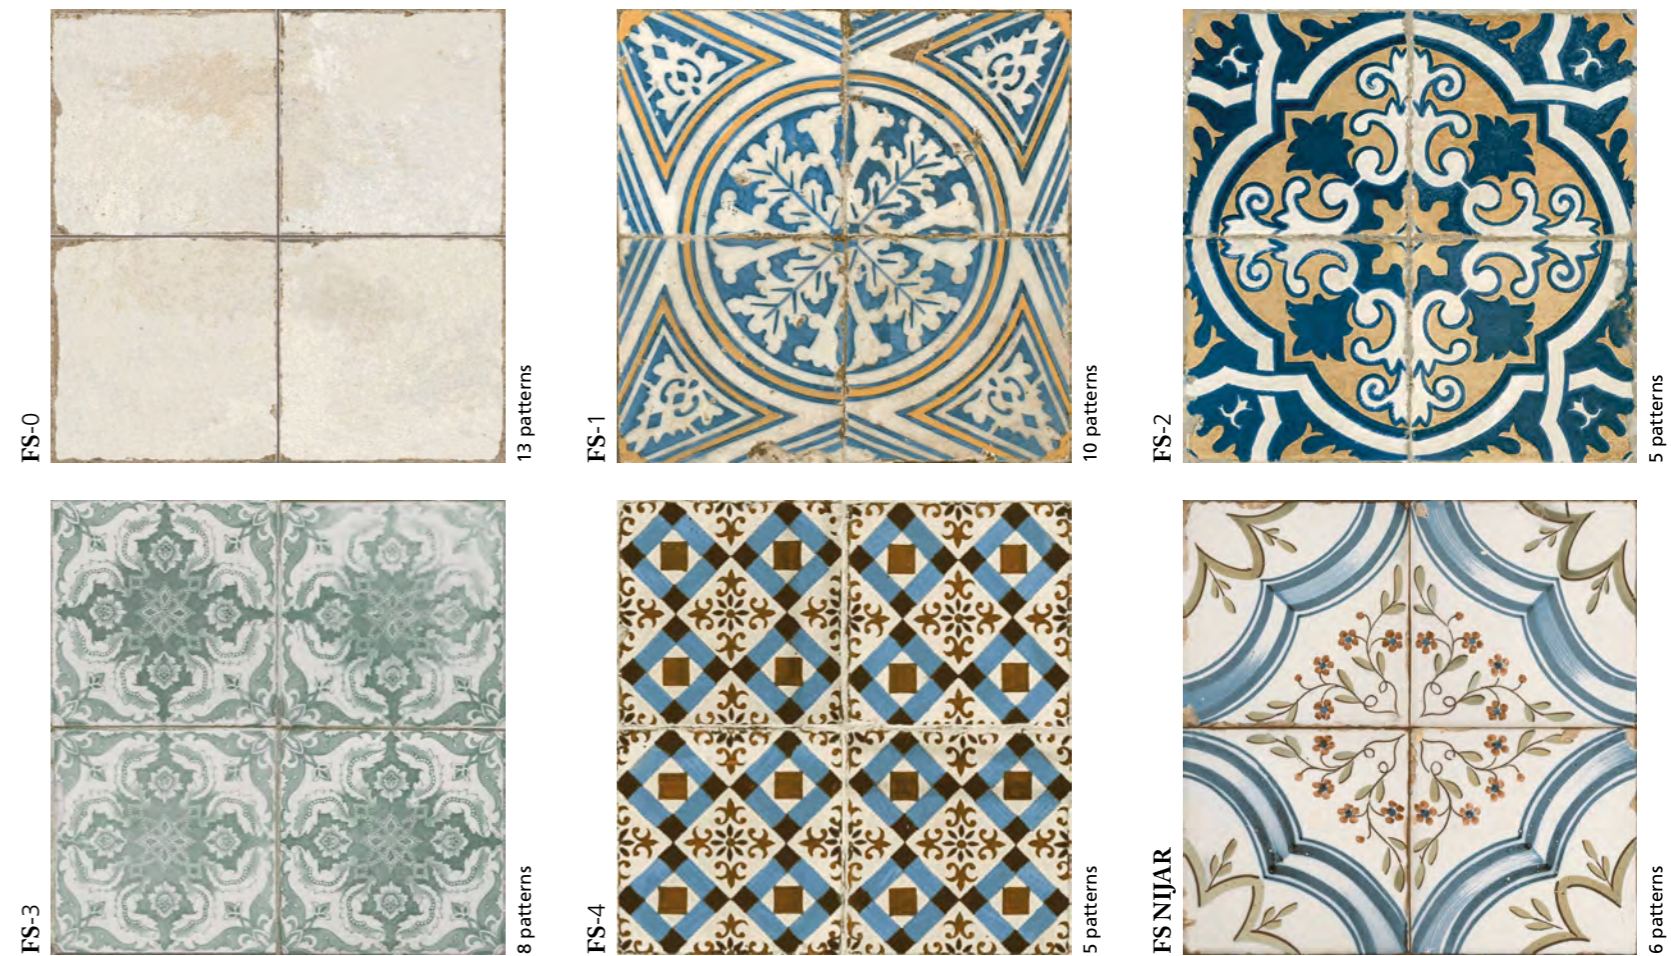

## FS ORIGINAL

45 * 45 * 1,05 cm   18 * 18"	
NO RECTIFIED	NATURAL PRICE CODE BN14
FS-0	13305
FS-1	12500
FS-2	12501
FS-3	12519
FS-4	12541
FS NIJAR	20402



Rodapie - Skirting (R. FS 0)  
8 \* 45 cm | 3 \* 18" PB

CARACTERÍSTICAS TÉCNICAS   TECHNICAL CHARACTERISTICS			
joint 1,5 mm	versatile	matt	diferent shades
shade variation V2	various graphics	various moulds	

CARACTERÍSTICAS TÉCNICAS ANTIDESLIZAMIENTO   ANTI-SLIP CHARACTERISTICS			
Ensayo   Essay	Características   Features	Resultado   Result	
		0, 1, 2, 3, 4	NIJAR
DIN 51130	Ángulo crítico (Pies calzados)   Critical angle (footwear)	R9	R10
DIN 51097	Ángulo crítico (Pies descalzos)   Critical angle (Wet loaded barefoot)	-	A+B
BS-77976-2	Antideslizamiento (Test del péndulo)   Slip resistance (Pendulum test-PTV)	+36 Wet	+36 Wet
UNE-ENV 12633	Antideslizamiento (Test del péndulo)   Slip resistance (Pendulum test)	Class 1	Class 2
AINSI A137.1	Coefficiente de Fricción Dinámico   Dynamic Coefficient of Friction (DCOF)	-	>0,42
ISO 10545-7	Resistencia a la Abrasión Superficial/Resistance to Surface Abrasion	PEI 4	PEI 3

EMBALAJE   PACKING		(Los pesos aquí reflejados pueden sufrir ligeras variaciones en función del lote de producción. Weights shown here may slightly vary depending on the production lot.)							
Formato   Sizes	Cajas   Boxes	Pallet			Cont./20'		Cont./20'		
		Piezas	m <sup>2</sup> / sq.m	kg	Cajas	m <sup>2</sup> / sq.m	kg	Tamaño cm aprox.	m <sup>2</sup> / sq.m
45 * 45 * 1,05	5	1	23,139	66	66	1551	120 * 80 * 105	914,89	1021,28
17 11/16 * 17 11/16 * 7/16	5	10,76	51,02	66	710,42	3419,96	47 1/4 * 31 1/2 * 41 5/16	9847,91	10993,02